

CLASSIC WOOD DECK TILES

Our Wood Deck Tiles can be used for most commercial or residential applications including rooftop decks, elevated terraces, plazas, and other large exterior spaces. Our Wood Deck Tiles:

- are **structural decking tiles** which are prefabricated panels of 13/16" slats screwed into three solid wood support battens with stainless screws
- have exceptional **strength, durability, and resistance** to flexing
- are used with adjustable height pedestals for construction of elevated decks on rooftops and over sloping or uneven surfaces
- can be laid over existing concrete using fixed height spacers (1/2" - 1") to lift the tiles off the surface and ensure **sufficient drainage**
- have slots cut in the corner of each tile which enables the Lock Down Tab to be inserted, ensuring a **safe, secure and level surface**



• Special order product



• Full Pallet
• Full Load



• 320 ft² per Pallet
• 26 Pallets per Load (8,320 ft²)

TECHNICAL DATA

Paver Dimensions (L x W x H):

WDT-SPECIES-24/24 24" x 24" x 1 1/2"

WDT-SPECIES-48/24 48" x 24" x 1 1/2"

Paver Weight:

- 4 lbs. / ft²

Janka Hardness:

- 1,798 lbs. (Classic-Light)
- 2,100 lbs. (Classic-Dark)

Modulus of Elasticity:

- 2,900,000 lbs. / in² (Classic-Light)
- 2,560,000 lbs. / in² (Classic-Dark)

Modulus of Rupture:

- 20,950 lbs. / in² (Classic-Light)
- 18,400 lbs. / in² (Classic-Dark)

Density @ 12% Moisture:

- 930 KG / m³ (Classic-Light)
- 850 KG / m³ (Classic-Dark)

Resistance to Decay & Insect Attack:

- Decay, fungi, & termites

*Not resistant to marine borers

Freeze-Thaw Durability:

- Class A

Fire Rating:

- Class A


Shrinkage:

- 8.8% tangential
- 6.3% radial


Wood Deck Tiles come in two standard sizes: 24" x 24" squares and 48" x 24" rectangles. Each wood option below can be ordered in either size to suit your decking needs and design aesthetic.



24" x 24" WOOD DECK TILE

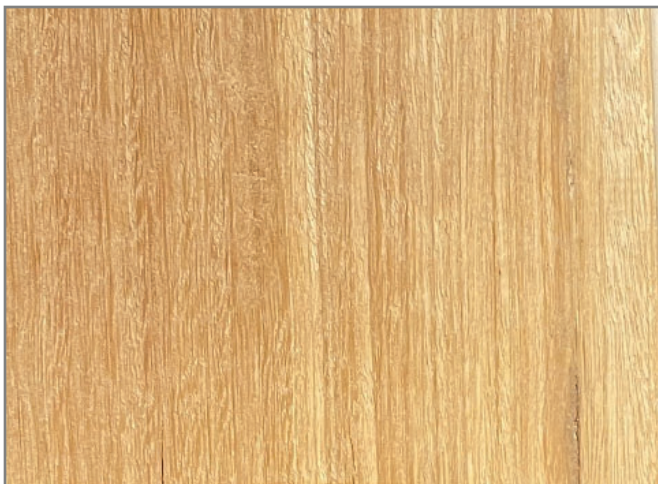

CLASSIC - LIGHT

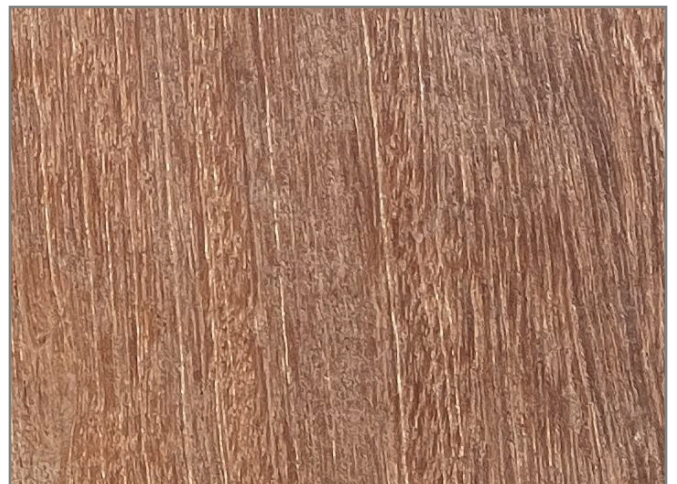

CLASSIC - DARK